




D20607F vehicle low voltage wiring harness

Vehicle low-voltage wiring harness, new energy automotive wiring harness processing

1. All the circuits connected to the motor end of the motor are connected with a solid twisted pair shield, and the three pairs of differential signals are used to satisfy the set of twisted pairs respectively.
 2. The vehicle side and the motor controller connected to the circuit, the vehicle CAN and debugging CAN use a solid twisted pair shielded wire
 3. Wire harness used in all the wire, can reach 80 °C long-term normal work
- According to map processing to meet your various needs of customization

Harness processing automotive wiring harness wiring harness

Specification

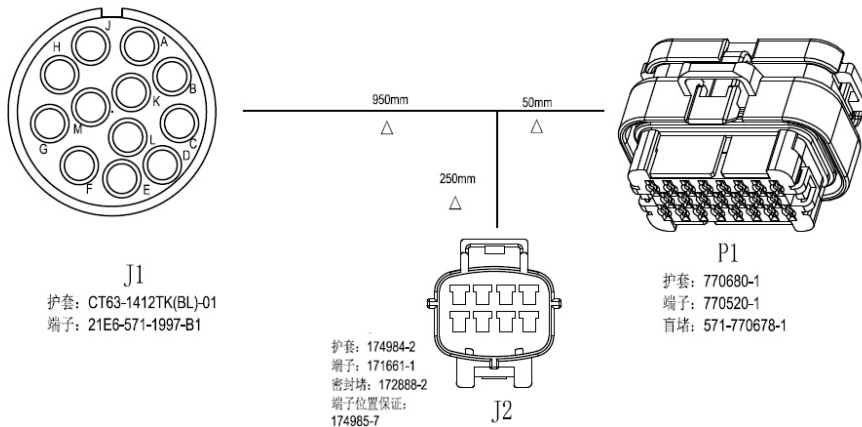

回路号	胶壳号	插孔编号	胶壳号	插孔编号	备注
A001		A 红		23	两芯双绞
A002		B 蓝		22	
A003		C/D			
A004		E/F		21	屏蔽层绞成线 分两股各压一个端子
A005		G 黑		6	
A006		H 棕		13	两芯双绞
A007		J 白		5	
A008		K 绿		12	两芯双绞
A009		L 紫		4	
A010		M 橙		11	两芯双绞
A011	J1	1	P1	1,16	0.8红色线 分两股各压一个端子
A012		2		9	0.8黑色
A013		3 红		18	
A014	J2	4 蓝		10	两芯双绞
A015		5		20	屏蔽层绞成线
A016		6 红		2	
A017		7 蓝		17	两芯双绞
A018		8		20	屏蔽层绞成线

Product Show

