



## Double split corrugated pipe

### Double split corrugated pipe



Material: PA or PP

Color: black, other colors can be purchased, from the MOQ requirements.

Temperature: -40 °C - 85 °C

Product Certification: European CE, the European environmental ROHS, REACH.


Features: good surface gloss; mechanical load strength is good; good soft performance; full can be opened, easy to install and modify, high temperature deformation, chemical resistance and strong.

Uses: can protect the wire and cable from external wear and insulation load capacity: not easy to deformation, but can quickly recover, and itself without any damage.

Applications: machine cabinets, machine tool manufacturing, electrical equipment, automation equipment, food, packaging and other machinery;



Use: wire and cable into the tube, and then with the Japanese series of hose joints can be used.

Note: Have MOQ requirements.



[Double bell corrugated pipe](#) [bellows](#) [bellows prices](#)

## Specification

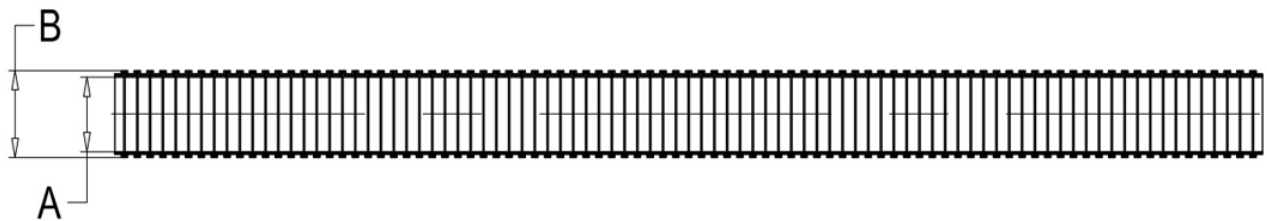

Item No			Inside diameter	Outside diameter	Packing M
Double layer PP high temperature black	Double layer PA high temperature black	Double-layer PA high temperature black flame retardant	mm I.D I	mm O.D A	
BG2-12*18PPB	BG2-12*18NB	BG2-12*18NBV0	12.8	18.7	50
BG2-24*31PPB	BG2-24*31NB	BG2-24*31NBV0	24.8	31.8	50
BG2-31*41PPB	BG2-31*41NB	BG2-31*41NBV0	31.8	41.9	50

## Product Show

---



## Download

---

